

Baker Hall Technical Information Package

Key Staff:

Administrative Director:	J. Andrew Cassano, jacf11@lehigh.edu		
Artistic Director:	Deborah Sacarakis, ds00@lehigh.edu		
Production Manager:	Joshua Kovar, jok7@lehigh.edu		
Assistant Production Manager:	R. Elizabeth Miller, rema@lehigh.edu		
Director of Audience Services:	Sandra Anderson, saba@lehigh.edu		
Lighting Coordinator:	Kolby Clarke, koc217@lehigh.edu		
Assistant Lighting Coordinator: Haley Brown, heb217@lehigh.edu			
Audio Coordinator:	Phil Ingle, phi214@lehigh.edu		
Stage Coordinator:	Becky Eshelman, ree2@lehigh.edu		
Costume Shop Coordinator:	Pamela Richey, pdr3@lehigh.edu		
Administrative Assistant/Hospi	tality: Cyndy Brinker, cb0e@lehigh.edu		
Assistant to Artistic Director:	Tahya Trish Keenan pak512@lehigh.edu		

Address: Shipping and physical address:

420 East Packer Avenue, Bethlehem, PA 18015-3179.

Phone Numbers: All members of the Zoellner staff can be reached via 610-758-5323 as well as the numbers below.

610-758-5323
610-758-5643
610-758-5892
610-758-2799
610-758-6537
610-758-2252

Facility Description: The Zoellner Arts Center is a 21-year-old multi-venue arts center housing four departments, Art Gallery, Music, Presenting, and Theatre. All building resources are shared among these four departments.

Zoellner has three performance spaces, Baker Hall, a 940-seat concert/ proscenium stage. Diamond Theatre, a 3/4 thrust stage seating 307, and the Fowler Black Box Theatre, a small multi-configuration space.

Technical Specifications ~ Baker Hall

Seating:

Seating is continental. Handicapped seating is located at the back of the orchestra and grand tier. Usual capacity is 934, 283 orchestra, 473 grand tier and 178 balcony. 68 seats can be set on the orchestra lift to bring total seating to 1002. For a more intimate space an acoustically transparent curtain can be lowered behind the orchestra seating.

Stage Dimensions:

- ▶ Theatre Mode: proscenium opening is 37'-6"w x 25'-3"h.
- ➤ Concert Shell: proscenium opening is 58'-0"w x 25'-3"h.
- \blacktriangleright Stage depth from the plaster line is 31'-6".
- ▶ Forestage depth from plaster line is 4'-9" with orchestra pit lowered.
- ▶ Forestage depth from plaster line is 17'-6" with orchestra pit raised.
- ➤ Orchestra pit dimensions are 12'9"d x 46'-6"w.
- ➤ Centerline to Stage left wall is 65'-0". A portion of the stage left wing is used for storage and office space.
- ▶ Centerline to Stage right wall is 36'-0". Useable wing space is approximately 17'.
- ▶ Rough square footage of stage plus wing space is 3300 square feet.
- ➤ Audience floor to stage floor is 2'-7".
- ➤ Orchestra pit @ pit level to stage floor is 8'-3".
- Stage floor to overhead catwalks is 57'-0". There is no gridiron.
- ▶ Plaster line to furthermost upstage line-set is 29'-0".

Stage Floor:

- >> Stage floor is white oak tongue and groove, stained black, sprung on neoprene sleepers.
- ▶ A gray/ black Harlequin dance floor is available. Rosin may be used.
- ▶ There are no traps in the floor.

Fly System:

- ▶ The fly system is a single purchase counter-weight system.
- \blacktriangleright The locking rail is located stage right @ 27'-0" from stage floor.
- ▶ Stage floor to pin rail is 27'-0".
- ➡ Stage floor to loading floor is 45'-0".
- ▶ There are 36 line-sets including the motorized main curtain and first electric.
- ▶ All operating lines are 3/4" Sta-Set X.
- ▶ Line-sets are rated for 1200 lbs.
- ▶ High trim is 55'-0" except for line 5 which trims at 44'-0"& 27 which trims at 42'-0".
- \blacktriangleright The bottom of the orchestra ceilings trim @ 45'-0" when stored.
- ▶ Low trim is 4'-0".
- ▶ Batten length is 56"-0", except lines 5 & 27 which are 47'-0'.
- ▶ Batten spacing varies. Please see line-set schedule.
- ▶ Battens behind orchestra shell walls don't fly past shell rigging easily.

Rigging:

>> There is no grid.

- ✤ Stage floor to catwalk floor is 57'-0"
- ➡ Stage Floor to roof steel is 62'-0"
- ▶ Rigging is under hung.
- ▶ Not all I-beams are accessible from catwalks.

Masking:

- ▶ The main curtain & grand teaser are made of a red heavy weight velour with fullness.
- ▶ There are two full stage black traveler curtains. Both with fullness. 56'-0" x 24'-0".
- ▶ 1 white leno-filled scrim, 56'-0" x 30'-0".
- ▶ 1 black scrim, 56'-0" x 30-0".
- ▶ 5 sets of black legs, 12'-0" x 24'-0". 0% fullness.
- ▶ 5 black borders, 56'-0" x 10'-0". 0% fullness.

Lighting Control:

- ▶ Control is an ETC Ion or an ETC Gio
- ▶ Dimmer per circuit, 2.4k ETC Sensors.
- ➤ The Ion is located in the light booth, at extreme house right, 39' from stage and 15' above the audience. The Gio is located in the house right audience crossover.

Lighting Inventory:

See attached for inventory. Please keep in mind that Zoellner is an academic institution and as such equipment is shared among three theatres.

Lighting Positions:

- ▶ #1 electric, line-set #5, is a motorized bridge with 40 circuits, 46'-8" long.
- ▶ #2 Electric, line-set #27, with 32 circuits, 46'-8" long.
- ▶ Over-stage electrics usually trim at an average 24' due to the height of available soft goods.
- ➤ Other electrics can be added as needed.
- ▶ There are 40 circuits available in 4 circuit drop boxes.
- ▶ There are 78 other circuits located throughout the theatre.
- There is a truss located directly downstage of the architectural shell ceiling with 5 High End Sola Theatre moving lights.
- ▶ There is 1 articulated FOH catwalk with 48 circuits. Standard position is 32' off stage floor.
- ➤ Two box booms are located house left & right at 18' from plaster line. The standard hang is 9 units, in three rows of three. All are ETC 26° Source Fours.
- ➤ The FOH and Box Boom positions have unusual structural obstructions. Please contact the Lighting Coordinator regarding these positions.
- ▶ There are eight 50lb round boom bases with 12' and 21' pipes available.
- ▶ 2 1.2k Lycian M2 follow-spots are located at rear of balcony extreme house left & right.

Repertory Lighting Plot:

- ▶ A standard house rep is available, see attached.
- >> Specials may be added as needed, and color may be changed.
- ➤ The rep hang over-stage provides sufficient masking and coverage for basic lighting needs and may be used as a general reference for spacing electrics and soft goods.
- Rep lighting paperwork can be provided electronically in Vectorworks, Lightwright, and/or Adobe Acrobat files.

Sound Control:

➤ The house mix position is extreme house left in the audience x-over 44' from the stage. There is about 8' x 12' of floor space. At no time is audience egress to be compromised.

Mixing Console:

- >> Yamaha CL5 (FOH, 32 in 16 out via installed Rio)
- >> Yamaha QL5 (MON, 32 in 16 out, additional 32 in and 16 via installed Rio)
- ▶ One portable rack with 2 Rios consisting of 64 inputs and 32 outputs available

Loudspeakers:

- → The primary L/C/R system consists of 3 EAW QX5 loudspeakers.
- → The balcony delay L/C/R system consists of 3 EAW QX5 loudspeakers.
- Front Fills consist of either 6 removable EAW SL52 speakers along the front edge of the stage, or 2 EAW RSX 129 speakers off to the sides of the proscenium.
- ➤ There are 2 EAW SB528zPi subwoofers permanently mounted.
- There are 8 EAW Micro-wedge stage monitors controllable from either the FOH position or a backstage monitor mix position.

- ▶ There are 2 EAW RSX 129 speakers available as side fill for the stage.
- There are 6, 3 per side, QSC K8 powered speakers mounted onstage for use as stage side fill monitors.
- ▶ There are 8 QSC K10 powered loudspeakers available as fills or monitors.
- ✤ There are 2 QSC K181 powered Subwoofers available.
- ▶ All FOH speakers are controlled via EAW UX 8800 processors.
- All power amplifiers are Lab Gruppen.
- ▶ 2 hanging points for speakers are located directly downstage of the left and right primary speakers. Each point is rated for 1700lbs.

Audio Equipment:

Check attached for inventory. Please keep in mind that Zoellner is an academic institution and as such equipment is shared among three theatres.

Monitor/ Intercom:

- ➤ A four channel wired Clear-Com system with patch points throughout the theatre is available. Channel D is reserved for paging.
- >> There is a two channel, four belt-pack Riedel Bolero wireless intercom system available.
- ▶ 2-way radios are available for point to point communication as needed.
- ➤ Backstage monitors in most backstage areas. There are 3 position switches that change which theatre is being monitored.

Company switch:

- ▶ 1 400 amp 3 phase switch is located up stage right.
- ➤ Tie-in must be arranged in advance.
- ▶ Direct lug-in is allowable or "new style" cam-locks may be used, adaptors are available.
- ➤ An additional 400 amp 3-phase switch is located in an adjacent theatre if needed. The feeder cable needed to bring to Baker Hall is not in our inventory. Orchestras Pit:
- The pit is located 8'-3" below the stage floor. The lift mechanism is a Gala Spiral lift and is too noisy to use during productions.
- ▶ The pit seats about 45 musicians.
- ▶ The pit can be "seated," adding 68 seats.
- ➤ There are various shapes and sizes of platforms available.
- ▶ 96 Wenger Symphony and 48 Wenger Musician's chairs are available.
- ▶ 200 Mitylite folding chairs are also available for use.
- ▶ 80 Manhassett music stands and 60 lights are available.
- ➤ There are several conductor's podiums to choose from
- ➤ We have 2 Steinway pianos, one 7' and one 9' concert grand. A Yamaha upright is also available.

Dressing / Laundry rooms:

Dressing rooms are located one floor below Baker Hall.

▶ Please keep in mind that Zoellner is an academic institution and as such equipment is shared

among three theatres.

- → There are 2 individual dressing rooms with private shower/ washroom.
- ▶ There are 2 4-person dressing rooms with private shower/ & a shared washroom.
- There are 2 ensemble dressing rooms. The women's seats 26 and the men's19. Each has showers and shared washrooms.
- ➤ The greenroom has a computer with high speed internet access, phone, refrigerator, and microwave oven. Hospitality is usually located inside the greenroom or directly outside.
- ▶ Laundry room has a single washing machine & an electric dryer.
- An iron and a Jiffy steamer are available upon request.
- A wig dryer is available upon request.
- ✤ 4-6 portable wardrobe racks are available.

Loading Facilities:

- ➤ The loading dock is located on East Packer Ave. It is immediately to the right of the parking lot entrance.
- ▶ Dock will accommodate a 53' trailer and tractor. Driveway opening is 14' high.
- → The loading dock opens onto a hallway leading directly to stage left.
- ➤ Door opening is 9'-0" x 9'-7" high. Hallway and inner doors will accommodate scenery at least that height.
- → The dock is 3' above driveway & has an integral, adjustable dock plate.

Internet/ Phones:

- ➤ There is closed WiFi access available throughout the building. The production manager or asst. production manager can help configure guest computers.
- ▶ There is a computer with internet access located in the greenroom for guest use.
- ✤ There are two computers backstage left for crew and guest use.
- There is a phone located in the greenroom for guest use. Long distance calls must be made using calling cards.




Baker Hall ~ Lighting Inventory

Manuf.	Unit Type/Model #	BH
Ellipsoidal		
ETC	Source 4 Bodies	146
ETC	Source 4 10°	6
ETC	Source 4 14°	18
ETC	Source 4 19°	34
ETC	Source 4 26°	58
ETC	Source 4 36°	43
ETC	Source 4 50°	8
ETC	Source 4 70°	2
ETC	Source 4 Zoom 15-30°	24
Wash		
ETC	Source 4 PAR	2
Altman	Par 64	43
MBT	Par 64	5
Altman	8" Fresnel - 75Q	53
Сус		
Altman	Sky-Cyc-03	8
ETC	MultiPAR	
L&E	L & E Ministrips	
Altman	R 40 Striplights	0
Automated		
VariLite	VL1000-TS	6
Martin	MAC 2000 Profile	4
High End	Solaframe Theatre	5
Other		
	Inkie - 3.5" Fresnel	2
Followspots		
Lycian	Lycian M2 Medium Throw	2
Lycian	Lycian 1266	2
Misc.		
Altman	Mini 10	6
	TOTAL INVENTORY	477

Page 7 Created: 01/00 Revised: 01/18



Baker Hall ~ Repertory Light Plot

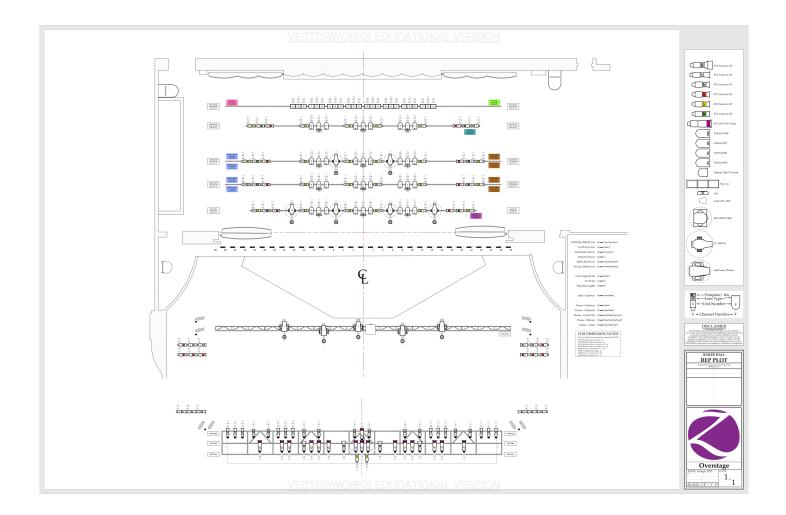



Baker Hall ~ Audio Inventory

Equipment Type	Brand/ Model	# in Stock
Mixing Console	Yamaha CL5	1
iMac w/QLAB	iMac w/QLAB Apple	
Multi-channel Interface	MOTU 828mk2	1
Dual CD player	Numark CDN450	1
CD player	Denon DN-C680	1
Compact Flash Recorder	Tascam –SSR1	1
Microphones	Neumann, AKG, Shure	Variety
Wireless Microphones	Shure ULX D	20 Channels
Microphone Stands	Variety	Variety

Page 9 Created: 01/00 Revised: 01/18



Standard Line Set Schedule

*Shaded items are permanently rigged and not movable. Legs are 12'-0"w x 24'-0"h. Borders are 30'-0" x 10'-0"h.

Line Set #	On Line Set Currently	Distance From Plaster Line	Description	Notes:
1	House Border	0"-10"	50% fullness, Red,	56'-0"h x 12'-0"w
2	House Curtain	1'-8"	50% fullness, Red, traveler or guillotine	2 panels: 30'-0"w x 24'-0"h
3	Rep Legs	2'-4"		
4		2'-9"		
5	1 st Electric	4'-6"	40 circuits.	Motorized Bridge
6	O. Shell Ceiling	6'-10"	Articulated shell ceiling	53'-3"w x 45-7" h (Stored)
7		7'-7"		Will not fly past the shell.
8	Rep Border	8'-1"		
9	Rep Legs	8'-10"		
10		9'-4"		
11		9'-10"		
12	2 nd Electric	10'-7"		
13		11'-4"		
14		12'-1"		
15	Rep Border	12'-10"		
16	Rep Legs	13'-7"		
17		14'-1"		
18	3 rd Electric	14'-7"		
19		15'-4"		
20	Mid-stage Traveler	16'-2"	50% fullness, Black, traveler or guillotine	2 panels: 30'-0"w x 24'-0"h
21	O. Shell Ceiling	16'-9"	Articulated shell ceiling	45'-7"w x 37'-11" h (Stored)
22		17'-10"		Will not fly past the shell.
23		18'-7"		
24	Rep Border	19'-4"		
25	Rep Legs	20'-1"		
26		20'-10"		
27	4 th Electric	21'-10"	32 circuits	
28	Rep Border	23'-10"		
29	Rep Legs	24'-7"		
30	5 th Electric	25'-1"		Cyc units
31		25'-10"		
32	O. Shell Ceiling	26'-7"	Articulated shell ceiling	45'-7"w x 9'-10" h (Stored)
33		27'-1"		Will not fly past the shell.
34	Up-stage Traveler	27'-9"	50% fullness, Black, traveler or guillotine	2 panels: 30'-0"w x 24'-0"h
35		28'-2"		
36	White Cyc	28'-9"		47'-0''w x 30'-0''h